

EVX 12120 12 12


EVX 12120 - (400 100% 1800 30%)



12 (6)			
12 A 20-	U	-1.75 /	25°
3.83			
150/180A (5)			
15.4			
		-15°	+50°
		-15°	+40°
		-15°	+40°
-			
25°			
13.5 - 13.8		25°	
3.6 A ()			
			I _{max}
14.4 - 15.0		25°	
		25°	6- *
F1/F2-Faston Tab 187/250			
ABS			



151.0±2.0	98±1.0	94.1±1.0	100.3±1.5
-----------	--------	----------	-----------

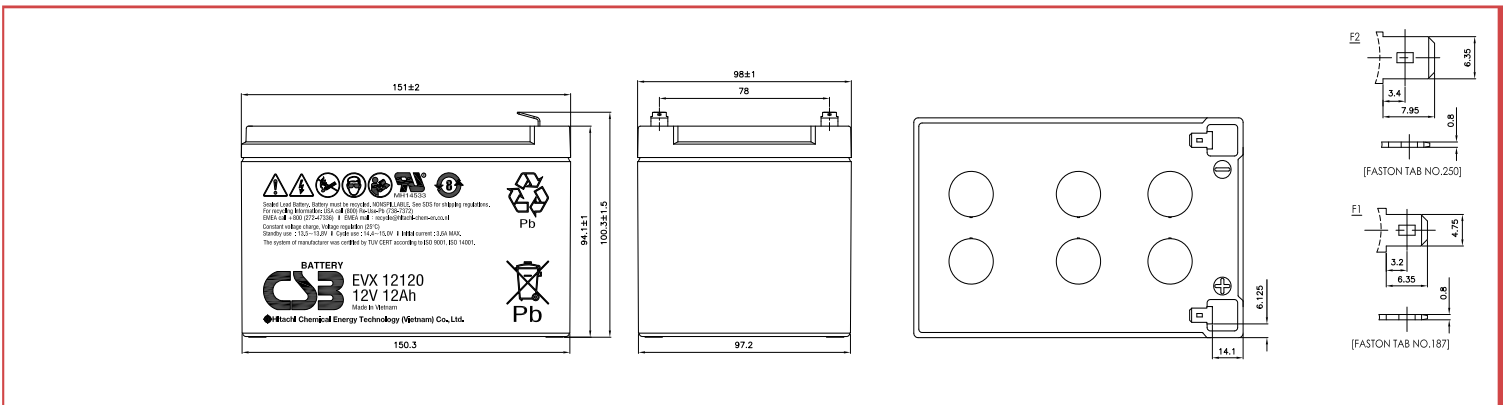

: A (25°)

U _k /T	30	45	60	90	2	3	4	5	6	8	10	20
1.60	12.8	9.38	7.52	5.46	4.32	3.14	2.45	2.06	1.75	1.36	1.13	0.66
1.67	12.7	9.30	7.45	5.45	4.29	3.10	2.44	2.05	1.74	1.35	1.12	0.63
1.70	12.6	9.23	7.40	5.41	4.28	3.09	2.43	2.04	1.73	1.34	1.11	0.62
1.75	12.4	9.14	7.36	5.36	4.25	3.07	2.41	2.01	1.71	1.33	1.09	0.60
1.80	12.0	8.89	7.18	5.28	4.17	3.00	2.38	1.99	1.70	1.32	1.07	0.59
1.85	11.3	8.46	6.89	5.08	3.99	2.90	2.30	1.92	1.64	1.27	1.04	0.57

: / (25°)

U _k /T	30	45	60	90	2	3	4	5	6	8	10	20
1.60	146	107	86.1	63.4	50.5	36.8	29.3	24.4	20.8	16.2	13.4	7.13
1.67	146	107	85.7	62.9	50.1	36.6	29.1	24.3	20.7	16.1	13.3	7.09
1.70	144	106	85.2	62.7	50.0	36.4	28.9	24.2	20.6	16.0	13.2	7.06
1.75	143	105	84.9	62.3	49.5	36.2	28.8	23.9	20.4	15.9	13.1	7.01
1.80	140	103	83.5	61.2	49.0	35.7	28.5	23.7	20.2	15.7	12.9	6.87
1.85	132	98.5	80.0	59.4	47.4	34.5	27.7	23.0	19.6	15.2	12.5	6.66